



A Fluke Company

# Food Tracker®

## Thermal Barriers

Not all food processes are equal. Every process has its own unique space, temperature, duration or environmental requirements (steam, submersion in water or oil). For this reason, the Food Tracker® system includes a choice of thermal barriers. Options vary from quick flash frying where the whole system is submerged, to long duration high temperature bakery processes. All Datapaq® barriers are designed and engineered to deliver maximum performance at a minimum weight and size.

### TB5009

#### Non-submersible / short bake / roast processes

<b>IP Rating</b>	IP65				
<b>Height</b>	60 mm (2.4 in)				
<b>Width</b>	204 mm (8 in)				
<b>Length</b>	394 mm (15.5 in)				
<b>Weight</b>	4.4 kg (9.7 lbs)				
<b>Heatsink</b>	N/A				
<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time (hours)</b>	1.5	3.0	1.75	1.25	1.0

### TB5010

#### Non-submersible / short bake / roast processes

<b>IP Rating</b>	IP65				
<b>Height</b>	100 mm (3.9 in)				
<b>Width</b>	219 mm (8.6 in)				
<b>Length</b>	393 mm (15.5 in)				
<b>Weight</b>	6.0 kg (13.2 lbs)				
<b>Heatsink</b>	TB1001 (1.0 kg / 2.2 lbs)				
<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time (hours)</b>	–	10	5.5	3.75	2.5

### TB5011

#### Non-submersible / short bake / roast processes

<b>IP Rating</b>	IP65				
<b>Height</b>	40 mm (1.6 in)				
<b>Width</b>	195 mm (7.7 in)				
<b>Length</b>	384 mm (15.1 in)				
<b>Weight</b>	3.0 kg (6.6 lbs)				
<b>Heatsink</b>	N/A				
<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time (minutes)</b>	–	105	60	40	35


### TB5016

#### Heavy duty / waterproof / ham cook / chill processes

<b>IP Rating</b>	IP67				
<b>Height</b>	120 mm (4.7 in)				
<b>Width</b>	206 mm (8.1 in)				
<b>Length</b>	401 mm (15.8 in)				
<b>Weight</b>	6.3 kg (13.9 lbs)				
<b>Heatsink</b>	TB1001 x 2 (2 x 1.0 kg / 2.2 lbs)				
<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time (hours)</b>	–	17	8	5	4



# TECHNICAL SPECIFICATIONS

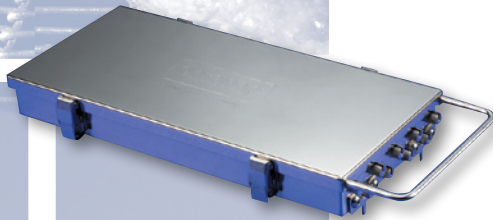

## TB5815

Submersible / short fry / steam cook processes

<b>IP Rating</b>	IP67				
<b>Height</b>	40 mm (1.6 in)				
<b>Width</b>	178 mm (7 in)				
<b>Length</b>	398 mm (15.7 in)				
<b>Weight</b>	3.1 kg (6.8 lbs)				
<b>Heatsink</b>	N/A				

<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time Air (minutes)</b>	37	120	60	45	40
<b>Time H<sub>2</sub>O / Oil (minutes)</b>	–	60	30	22	20

Optional Conveyor Dive Pin TB9704A x 2, Thermocouple Finger Screw TB9763

## TB5816

Submersible / long fry / steam cook processes

<b>IP Rating</b>	IP67				
<b>Height</b>	65 mm (2.6 in)				
<b>Width</b>	240 mm (9.4 in)				
<b>Length</b>	393 mm (15.5 in)				
<b>Weight</b>	5.3 kg (11.7 lbs)				
<b>Heatsink</b>	TB9707 x 2 (2 x 0.4 kg / 0.9 lbs)				

Optional Conveyor Dive Pin TB9704A x 2, Thermocouple Finger Screw TB9763


<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time Air (hours)</b>	–	6.5	3.5	2.5	1.75
<b>Time H<sub>2</sub>O / Oil (hours)</b>	–	3	1.5	1	0.75

## TB5817

Pressure cook processes

<b>IP Rating</b>	IP67				
<b>Height</b>	105 mm (4.1 in)				
<b>Width</b>	150 mm (5.9 in)				
<b>Length</b>	360 mm (14.2 in)				
<b>Weight</b>	6.3 kg (13.9 lbs)				
<b>Heatsink</b>	TB1001 x 2 (2 x 1.0 kg / 2.2 lbs)				
<b>Pressure</b>	2 bar (29 psi)				

<b>Temperature</b>	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
<b>Time Air (hours)</b>	–	14	7.5	4.5	3.5

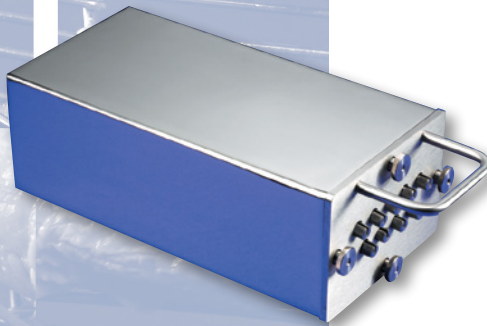

TB9772-Barrier Tray  
(fitted with drive pins)



TB9800-Hanging Hook



SCI1157-Box Spanner

## ACCESSORIES

Barrier tray used in mesh belt applications with inclines to help transfer the equipment. Box spanner used on submersible barriers.

## The Worldwide Leader in Temperature Profiling



**Europe and Asia**  
DATAPAQ Limited,  
Deanland House, 160 Cowley Road,  
Cambridge CB4 0GU, UK  
Tel: +44 (0)1223 423 141  
Fax: +44 (0)1223 423 306  
E-mail: sales@datapaq.co.uk  
Web: www.datapaq.com

**North and South America**  
DATAPAQ Inc,  
187 Ballardvale Street,  
Willimington, MA 01887, USA  
Tel: +1 978 988 9000  
Fax: +1 978 988 0666  
E-mail: sales@datapaq.com  
Web: www.datapaq.com

**Germany**  
DATAPAQ GmbH,  
Valdorfer Straße 100  
D-32602 Vlotho, Deutschland  
Tel: +49 5733 9107 0  
Fax: +49 5733 9107 27  
E-mail: sales@datapaq.de  
Web: www.datapaq.de



www.datapaq.com

© 2011 Datapaq (barriers Rev B) 6/2011  
Datapaq, the Datapaq logo and Food Tracker  
are registered trademarks of Datapaq.  
Specifications subject to change without notice.